


Cowl Panel Grille


Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the windshield wiper pivot arm.
Refer to: [Windshield Wiper Pivot Arm](#) (501-16 Wipers and Washers, Removal and Installation).
2. On both sides.
Remove the screws.

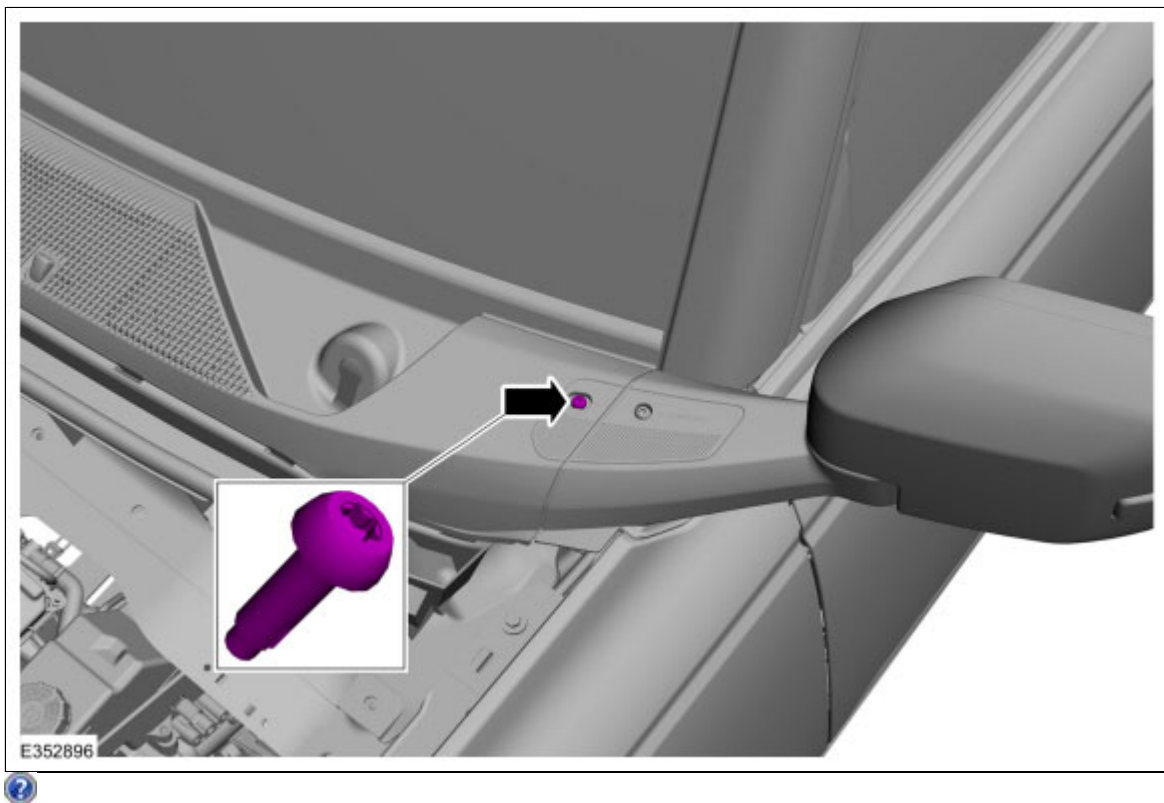


3. Release the tabs and gently pull out the cowl panel grille.

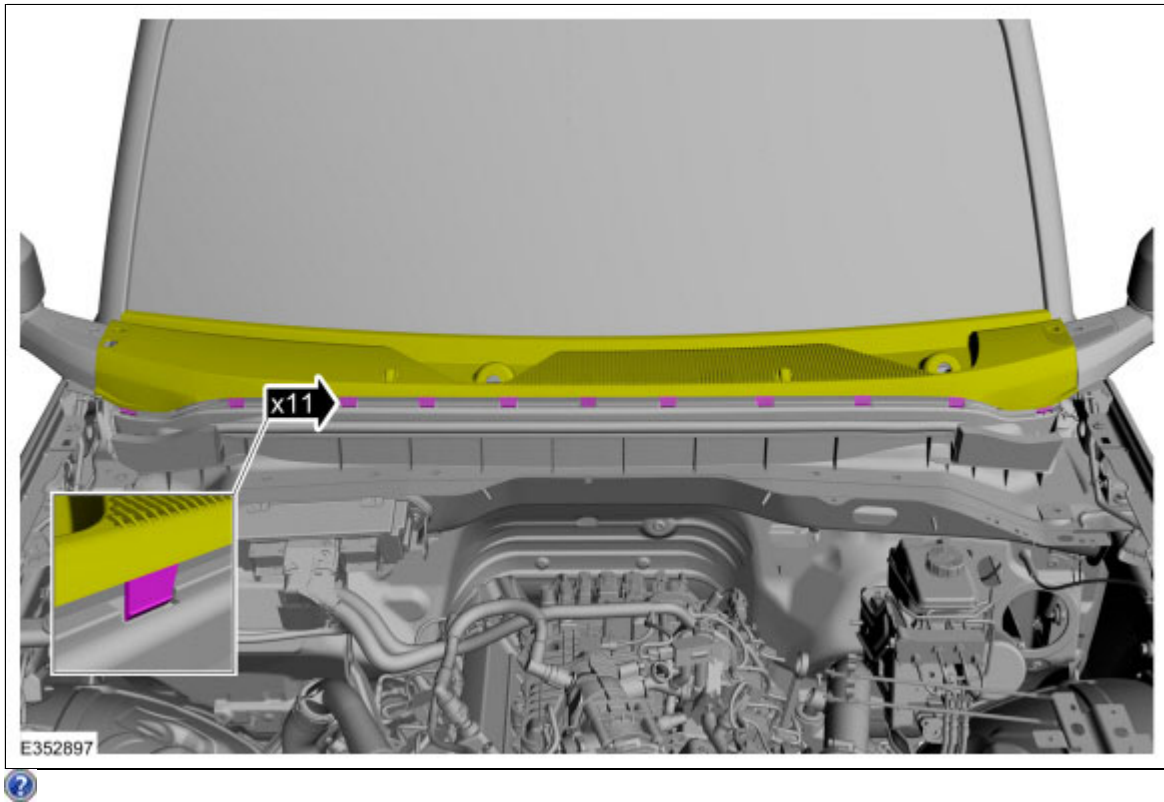

4. **NOTE:** After installation there must not be any gap between cowl panel grille and windshield.

1. Pull out the attachment from windshield.
2. Disconnect the wiper washer hose below the RH side and remove the cowl panel grille.

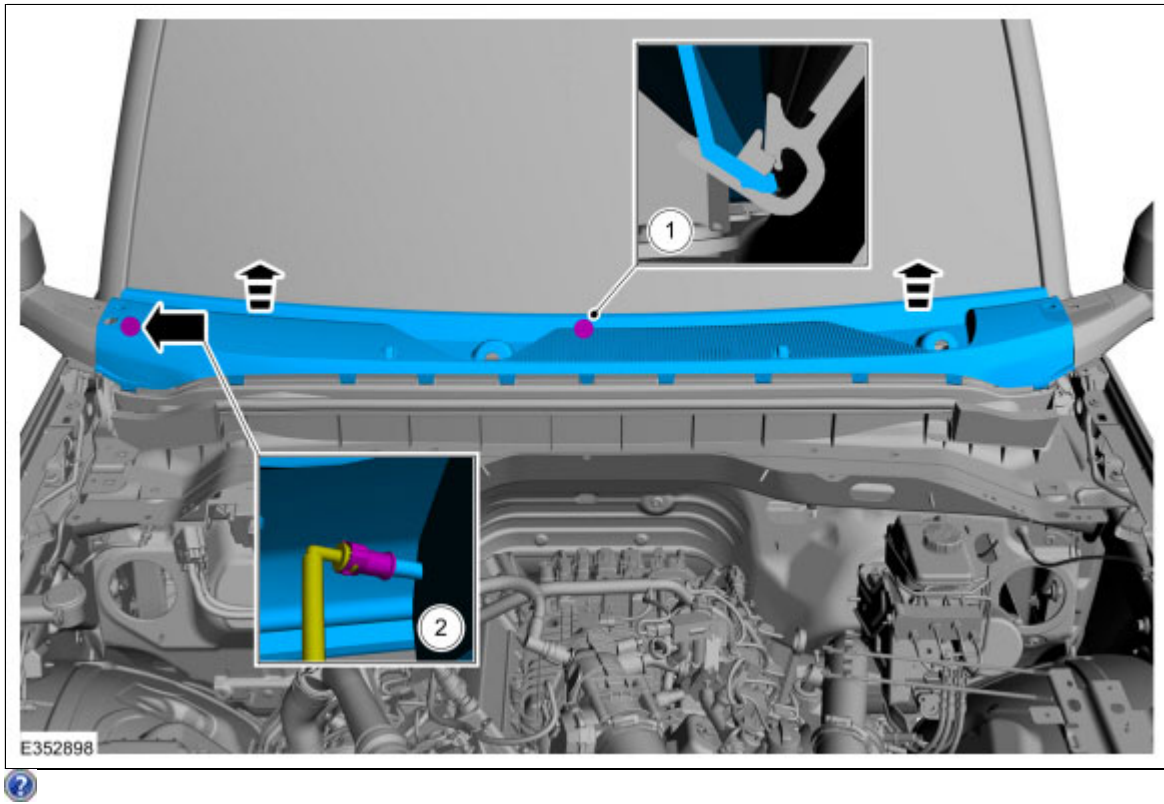

Installation

1. To install, reverse the removal procedure.

Copyright © Ford Motor Company