




SECTION A-A
TPA SHOWN IN AS-SHIPPED
PRE-LOCKED POSITION
SEE NOTE 3




SECTION A-A
TPA SHOWN IN FINAL
LOCKED POSITION

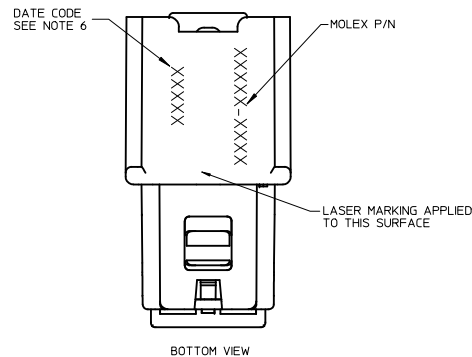


BOTTOM VIEW

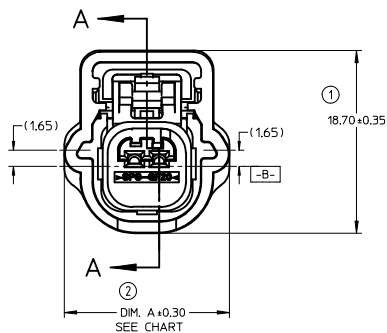


FRONT VIEW



RIGHT SIDE VIEW

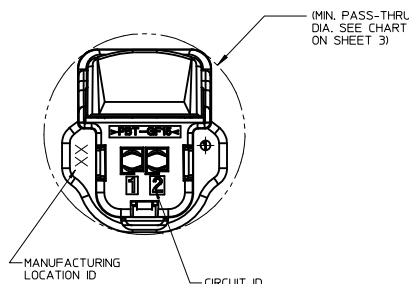

BACK VIEW

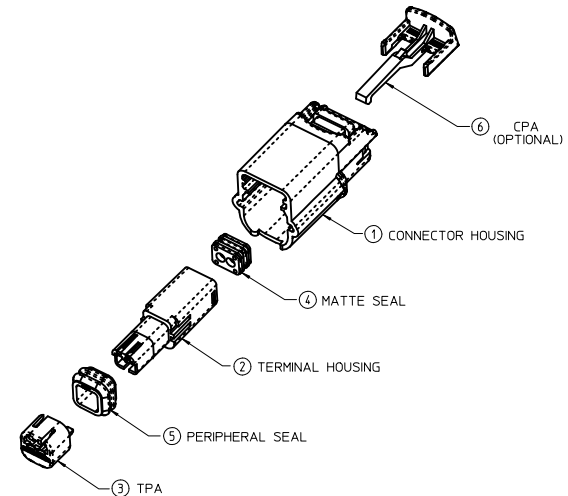

ITEM	DESCRIPTION	COLOR
1	CONNECTOR HOUSING	SEE CHART
2	TERMINAL HOUSING	BLACK
3	TPA	NATURAL
4	MATTE SEAL	SEE CHART
5	PERIPHERAL SEAL	SEE CHART
6	CPA - OPTIONAL	RED


CONNECTOR ASSEMBLY WITHOUT CLIPSLOT

NOTES:


- DESIGNED TO MATE WITH DEVICE CONNECTION AS SPECIFIED IN USCAR INTERFACE DRAWINGS FOR SINGLE ROW SEALED 0.64 SYSTEMS. SEE WWW.USCARTEAMS.ORG.
- ASSEMBLY SHIPPED WITH TPA IN PRE-LOCKED POSITION (SEE SECTION A-A). UPON FULL TERMINAL ASSEMBLY, TPA MUST BE SEATED TO THE FINAL LOCKED POSITION.
- TPA'S MAY BECOME SEATED DURING TRANSIT. IF THIS OCCURS, TPA'S SHOULD BE MOVED TO THE PRE-LOCKED POSITION PRIOR TO FEMALE TERMINAL INSTALLATION. REFERENCE PRODUCT SPECIFICATION: PS-34646-001
- SYSTEM TO BE USED WITH WIRE WITHIN RANGE OF 22 AWG TO 18 AWG. WITH OUTSIDE WIRE DIAMETERS RANGING FROM 1.50MM TO 2.06MM.
- POLARIZATION FEATURE EFFECTIVENESS PER USCAR-2 PARAGRAPH 5.4.4 IS REDUCED WHEN TESTING ALL POLARIZATION OPTIONS: 100% MIN.
- DATE CODE: FIRST TWO DIGITS ARE THE CALENDAR YEAR (EXAMPLE: 04 = 2004). THIRD THROUGH 5TH DIGIT DAY # OF THE CALENDAR YEAR (EXAMPLE: FEB. 3RD = '034').
- SEE SHEET #2 FOR CONNECTOR ASSEMBLY WITH CLIP SLOT.
- FOR CLIPSLOT CONNECTOR: CLIP OVERHANGS CONNECTOR, PLEASE CHECK APPLICATION (COULD CAUSE WIRE CHAFING)-SHORTER CLIP IS A RECOMMENDATION.

PART NUMBER LEGEND CONNECTOR ASSEMBLY


- 3140X-XXXX
- SEAL PLUG CONFIGURATION (AS MOLDED)
 - 0 - ALL CIRCUITS OPEN
 - 1-9 SEE CHART
 - CPA OPTION
 - 0 OR 2 - WITHOUT CPA
 - 1 OR 3 - WITH CPA
 - 4 - WITHOUT CPA, WITH CLIPSLOT
 - 5 - WITH CPA, WITH CLIPSLOT
 - USCAR POLARIZATION OPTION
 - 1 - POLARIZATION OPTION A
 - 2 - POLARIZATION OPTION B
 - 3 - POLARIZATION OPTION C
 - 4 - POLARIZATION OPTION D
 - 5 - POLARIZATION OPTION B, BLACK
 - 6 - POLARIZATION OPTION C, BLACK
 - 7 - POLARIZATION OPTION D, BLACK
 - CIRCUIT SIZE 2, 3, 4, 5, 6 & 8
 - TERMINAL OPTION
 - 2 - TYCO/MOLEX GET 0.64
 - 3 - MOLEX 0.64
 - 4 - YAZAKI KAIZEN 0.64




POLARIZATION A



POLARIZATION B



POLARIZATION C




POLARIZATION D

EC NO: UAU2011-0398 DRAWN: KUNNINGHAM 2010/10/05 CHKD: CHYKO APPR: WKOSHY	REV DESCRIPTION 2010/11/22	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.3 ± --- ANGULAR ± 3 °	DIMENSION STYLE MM ONLY DATE DRAWN BY: RCARLSON 2003/09/25 CHECKED BY: RCARLSON 2004/09/28 APPROVED BY: VKOSHY 2010/11/22	SCALE 4:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE 0.64 USCAR CONNECTOR SEALED SINGLE ROW ASSEMBLY	MOLEX INCORPORATED	DOCUMENT NO. SD-31402-211	SHEET NO. 1 OF 5

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS


SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



SECTION C-C


TPA SHOWN IN AS-SHIPPED
PRE-LOCKED POSITION
SEE NOTE 3





SECTION C-C

TPA SHOWN IN FINAL
LOCKED POSITION


DATE CODE
SEE NOTE 6

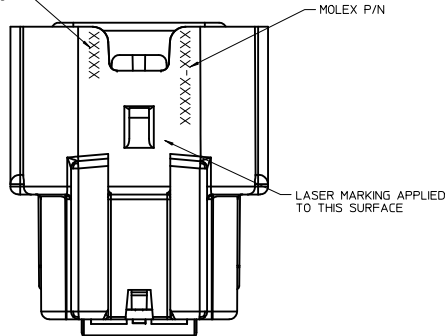


BOTTOM VIEW

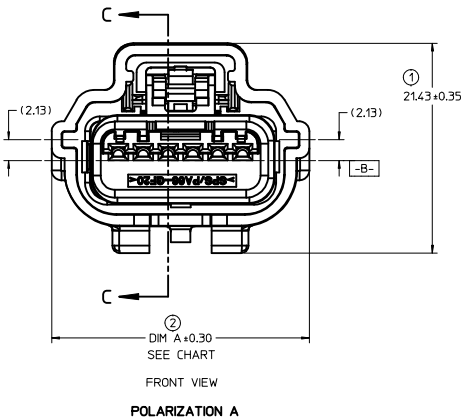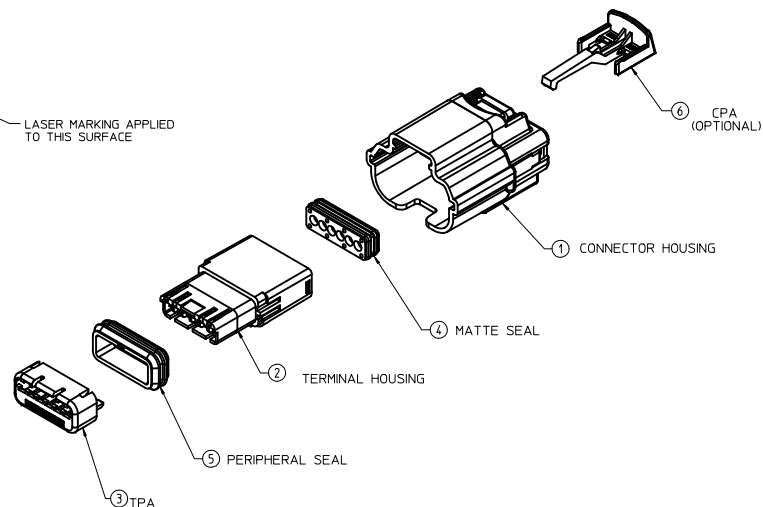

POLARIZATION A



RIGHT SIDE VIEW

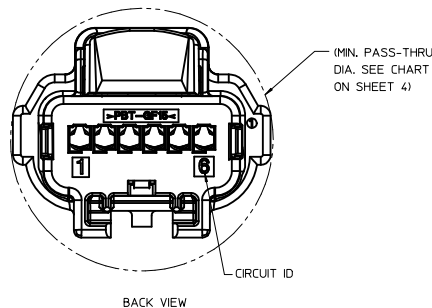

BACK VIEW

CONNECTOR ASSEMBLY WITH CLIPSLOT

ENTER DESCRIPTION EC NO: UAU2011-0398 DRAWN/CUNNINGHAM 2010/10/05 CHKD: APPR: VKOSHY 2010/11/22	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm INCH		DRAWN BY DATE		TITLE		
		4 PLACES ± ± ± ±		RCARLSON 2003/09/25		0.64 USCAR CONNECTOR SEALED SINGLE ROW ASSEMBLY MOLEX INCORPORATED		
		3 PLACES ± ± ± ±		CHECKED BY DATE				
		2 PLACES ± 0.13 ± ±		RCARLSON 2004/09/28				
		1 PLACE ± 0.3 ± ±		APPROVED BY DATE		MOLEX INCORPORATED		
ANGULAR ± 3 °		VKOSHY 2010/11/22						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-31402-211				
J2	REV	SIZE D THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
----	----	----	----	----	----	----	----	----	----	----	---	---	---	---	---	---	---	---	---

PART NUMBER WITHOUT CPA	PART NUMBER WITH CPA	CLIPSLOT OPTION	ROW/ CIRCUITS	KEY*	SEAL COLOR	CONNECTOR COLOR	WIDTH (M)	MIN. PASS THRU DIA.	FEMALE TERMINAL SUPPLIER	USCAR FOOTPRINT DRAWING NO.	STATUS						
31402-2100	31402-2110	NO	1 X 2	A	BLUE	BLACK	16.88	(20.80)	TYCO OR MOLEX GET 0.64	064-S-002-1-Z02	TOOLED						
31402-2200	31402-2210			B		GRAY					TOOLED						
31402-2300	31402-2310			C		BROWN					TOOLED, COLOR UNAVAILABLE						
31402-2400	31402-2410			D		GREEN					TOOLED, COLOR UNAVAILABLE						
31402-2500	31402-2510			B		BLACK					TOOLED						
31402-2600	31402-2610			C		BLACK					TOOLED						
31402-2700	31402-2710			D		BLACK					TOOLED						
31403-2100	31403-2110			A		BLACK					TOOLED						
31403-2200	31403-2210			B		GRAY					TOOLED						
31403-2300	31403-2310			C		BROWN					TOOLED, COLOR UNAVAILABLE						
31403-2400	31403-2410			D		GREEN					TOOLED, COLOR UNAVAILABLE						
31403-2500	31403-2510			B		BLACK					TOOLED						
31403-2600	31403-2610			C		BLACK			TOOLED BUT NOT VALIDATED								
31403-2700	31403-2710			D		BLACK			TOOLED								
31404-2100	31404-2110			A		BLACK			NOT TOOLED								
31404-2200	31404-2210			B		GRAY			NOT TOOLED								
31404-2300	31404-2310			C		BROWN			NOT TOOLED								
31404-2400	31404-2410			D		GREEN			NOT TOOLED								
31404-2500	31404-2510			B		BLACK			NOT TOOLED								
31404-2600	31404-2610			C		BLACK			NOT TOOLED								
31404-2700	31404-2710			D		BLACK			NOT TOOLED								
31402-3100	31402-3110			NO		1 X 3			A		RUST RED	BLACK	18.70	(22.00)	TYCO OR MOLEX GET 0.64	064-S-003-1-Z01	TOOLED
31402-3200	31402-3210								B			GRAY					TOOLED
31402-3300	31402-3310								C			BROWN					TOOLED, COLOR UNAVAILABLE
31402-3400	31402-3410	D	GREEN		TOOLED, COLOR UNAVAILABLE												
31402-3500	31402-3510	B	BLACK		TOOLED												
31402-3600	31402-3610	C	BLACK		TOOLED												
31402-3700	31402-3710	D	BLACK		TOOLED												
31403-3100	31403-3110	A	BLACK		TOOLED												
31403-3200	31403-3210	B	GRAY		TOOLED												
31403-3300	31403-3310	C	BROWN		TOOLED												
31403-3400	31403-3410	D	GREEN		TOOLED, COLOR UNAVAILABLE												
31403-3500	31403-3510	B	BLACK		TOOLED, COLOR UNAVAILABLE												
31403-3600	31403-3610	C	BLACK		TOOLED												
31403-3700	31403-3710	D	BLACK		TOOLED												
31404-3100	31404-3110	A	BLACK		TOOLED												
31404-3200	31404-3210	B	GRAY		TOOLED												
31404-3300	31404-3310	C	BROWN		TOOLED, COLOR UNAVAILABLE												
31404-3400	31404-3410	D	GREEN		TOOLED, COLOR UNAVAILABLE												
31404-3500	31404-3510	B	BLACK		TOOLED												
31404-3600	31404-3610	C	BLACK		TOOLED												
31404-3700	31404-3710	D	BLACK		TOOLED												
31402-4100	31402-4110	NO	1 X 4		A		BLUE	BLACK	21.25	(22.34)		TYCO OR MOLEX GET 0.64			064-S-004-1-Z02		NOT TOOLED
31402-4200	31402-4210				B			GRAY									NOT TOOLED
31402-4300	31402-4310				C			BROWN									NOT TOOLED
31402-4400	31402-4410			D	GREEN	NOT TOOLED											
31402-4500	31402-4510			B	BLACK	NOT TOOLED											
31402-4600	31402-4610			C	BLACK	NOT TOOLED											
31402-4700	31402-4710			D	BLACK	NOT TOOLED											
31403-4100	31403-4110			A	BLACK	NOT TOOLED											
31403-4200	31403-4210			B	GRAY	NOT TOOLED											
31403-4300	31403-4310			C	BROWN	NOT TOOLED											
31403-4400	31403-4410			D	GREEN	NOT TOOLED											
31403-4500	31403-4510			B	BLACK	NOT TOOLED											
31403-4600	31403-4610			C	BLACK	NOT TOOLED											
31403-4700	31403-4710			D	BLACK	NOT TOOLED											
31404-4100	31404-4110			A	BLACK	NOT TOOLED											
31404-4200	31404-4210			B	GRAY	NOT TOOLED											
31404-4300	31404-4310			C	BROWN	NOT TOOLED											
31404-4400	31404-4410			D	GREEN	NOT TOOLED											
31404-4500	31404-4510			B	BLACK	NOT TOOLED											
31404-4600	31404-4610			C	BLACK	NOT TOOLED											
31404-4700	31404-4710			D	BLACK	NOT TOOLED											
31402-5100	31402-5110			NO	1 X 5	A		BLUE			BLACK	21.25	(22.34)	TYCO OR MOLEX GET 0.64		064-S-005-1-Z01	TOOLED
31402-5200	31402-5210					B					GRAY						TOOLED
31402-5300	31402-5310					C					BROWN						TOOLED, COLOR UNAVAILABLE
31402-5400	31402-5410	D	GREEN			TOOLED, COLOR UNAVAILABLE											
31402-5500	31402-5510	B	BLACK			TOOLED											
31402-5600	31402-5610	C	BLACK			TOOLED BUT NOT VALIDATED											
31402-5700	31402-5710	D	BLACK			TOOLED											
31403-5100	31403-5110	A	BLACK			NOT TOOLED											
31403-5200	31403-5210	B	GRAY			NOT TOOLED											
31403-5300	31403-5310	C	BROWN			NOT TOOLED											
31403-5400	31403-5410	D	GREEN			NOT TOOLED											
31403-5500	31403-5510	B	BLACK			NOT TOOLED											
31403-5600	31403-5610	C	BLACK			NOT TOOLED											
31403-5700	31403-5710	D	BLACK			NOT TOOLED											
31404-5100	31404-5110	A	BLACK			NOT TOOLED											
31404-5200	31404-5210	B	GRAY			NOT TOOLED											
31404-5300	31404-5310	C	BROWN			NOT TOOLED											
31404-5400	31404-5410	D	GREEN			NOT TOOLED											
31404-5500	31404-5510	B	BLACK			NOT TOOLED											
31404-5600	31404-5610	C	BLACK			NOT TOOLED											
31404-5700	31404-5710	D	BLACK			NOT TOOLED											

EC NO: UAL2014-0398 DEPWANKUNNINGHAM 2010/10/05 CHKD: J22 APPR: WOSHY 2010/11/22	QUALITY SYMBOLS ▼=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±0.13</td> <td>±---</td> </tr> <tr> <td>1 PLACE</td> <td>±0.3</td> <td>±---</td> </tr> <tr> <td></td> <td>ANGULAR ± 3 °</td> <td></td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±0.13	±---	1 PLACE	±0.3	±---		ANGULAR ± 3 °		DIMENSION STYLE MM ONLY DRAWN BY DATE RCARLSON 2003/09/25 CHECKED BY DATE RCARLSON 2004/09/28 APPROVED BY DATE VKOSHY 2010/11/22	SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
	mm	INCH																						
4 PLACES	±---	±---																						
3 PLACES	±---	±---																						
2 PLACES	±0.13	±---																						
1 PLACE	±0.3	±---																						
	ANGULAR ± 3 °																							
EC NO: UAL2014-0398 DEPWANKUNNINGHAM 2010/10/05 CHKD: J22 APPR: WOSHY 2010/11/22	QUALITY SYMBOLS ▼=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±0.13</td> <td>±---</td> </tr> <tr> <td>1 PLACE</td> <td>±0.3</td> <td>±---</td> </tr> <tr> <td></td> <td>ANGULAR ± 3 °</td> <td></td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±0.13	±---	1 PLACE	±0.3	±---		ANGULAR ± 3 °		DIMENSION STYLE MM ONLY DRAWN BY DATE RCARLSON 2003/09/25 CHECKED BY DATE RCARLSON 2004/09/28 APPROVED BY DATE VKOSHY 2010/11/22	SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
	mm	INCH																						
4 PLACES	±---	±---																						
3 PLACES	±---	±---																						
2 PLACES	±0.13	±---																						
1 PLACE	±0.3	±---																						
	ANGULAR ± 3 °																							
EC NO: UAL2014-0398 DEPWANKUNNINGHAM 2010/10/05 CHKD: J22 APPR: WOSHY 2010/11/22	QUALITY SYMBOLS ▼=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±0.13</td> <td>±---</td> </tr> <tr> <td>1 PLACE</td> <td>±0.3</td> <td>±---</td> </tr> <tr> <td></td> <td>ANGULAR ± 3 °</td> <td></td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±0.13	±---	1 PLACE	±0.3	±---		ANGULAR ± 3 °		DIMENSION STYLE MM ONLY DRAWN BY DATE RCARLSON 2003/09/25 CHECKED BY DATE RCARLSON 2004/09/28 APPROVED BY DATE VKOSHY 2010/11/22	SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
	mm	INCH																						
4 PLACES	±---	±---																						
3 PLACES	±---	±---																						
2 PLACES	±0.13	±---																						
1 PLACE	±0.3	±---																						
	ANGULAR ± 3 °																							

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

PART NUMBER WITHOUT CPA	PART NUMBER WITH CPA	CLIPSLOT OPTION	ROW/ CIRCUITS	KEY*	SEAL COLOR	CONNECTOR COLOR	WIDTH DIM (A)	MIN. PASS THRU DIA.	FEMALE TERMINAL SUPPLIER	USCAR FOOTPRINT DRAWING NO.	STATUS
31402-5100	31402-5110	NO	1 X 5	A	RUST RED	BLACK	23.80	(24.28)	TYCO OR MOLEX GET 0.64	064-S-005-1-Z02	NOT TOOLED
31402-5200	31402-5210			B		GRAY					NOT TOOLED
31402-5300	31402-5310			C		BROWN					NOT TOOLED
31402-5400	31402-5410			D		GREEN					NOT TOOLED
31402-5500	31402-5510			B		BLACK					NOT TOOLED
31402-5600	31402-5610			C		BLACK					NOT TOOLED
31402-5700	31402-5710			D		BLACK					NOT TOOLED
31403-5100	31403-5110			A		BLACK			MOLEX 0.64		NOT TOOLED
31403-5200	31403-5210			B		GRAY					NOT TOOLED
31403-5300	31403-5310			C		BROWN					NOT TOOLED
31403-5400	31403-5410			D		GREEN					NOT TOOLED
31403-5500	31403-5510			B		BLACK					NOT TOOLED
31403-5600	31403-5610			C		BLACK					NOT TOOLED
31403-5700	31403-5710			D		BLACK					NOT TOOLED
31404-5100	31404-5110			A		BLACK			YAZAKI KAIZEN 0.64		NOT TOOLED
31404-5200	31404-5210			B		GRAY					NOT TOOLED
31404-5300	31404-5310			C		BROWN					NOT TOOLED
31404-5400	31404-5410			D		GREEN					NOT TOOLED
31404-5500	31404-5510			B		BLACK					NOT TOOLED
31404-5600	31404-5610			C		BLACK					NOT TOOLED
31404-5700	31404-5710			D		BLACK					NOT TOOLED
31402-6100	31402-6110	NO	1 X 6	A	BLUE	BLACK	26.33	(26.82)	TYCO OR MOLEX GET 0.64	064-S-006-1-Z02	TOOLED
31402-6200	31402-6210			B		GRAY					TOOLED
31402-6300	31402-6310			C		BROWN					TOOLED, COLOR UNAVAILABLE
31402-6400	31402-6410			D		GREEN					TOOLED, COLOR UNAVAILABLE
31402-6500	31402-6510			B		BLACK					TOOLED
31402-6600	31402-6610			C		BLACK					TOOLED
31402-6700	31402-6710			D		BLACK					TOOLED
31403-6100	31403-6110			A		BLACK			MOLEX 0.64		TOOLED
31403-6200	31403-6210			B		GRAY					TOOLED
31403-6300	31403-6310			C		BROWN					TOOLED, COLOR UNAVAILABLE
31403-6400	31403-6410			D		GREEN					TOOLED, COLOR UNAVAILABLE
31403-6500	31403-6510			B		BLACK					TOOLED
31403-6600	31403-6610			C		BLACK					TOOLED
31403-6700	31403-6710			D		BLACK					TOOLED
31404-6100	31404-6110			A		BLACK			YAZAKI KAIZEN 0.64		TOOLED
31404-6200	31404-6210			B		GRAY					TOOLED
31404-6300	31404-6310			C		BROWN					TOOLED, COLOR UNAVAILABLE
31404-6400	31404-6410			D		GREEN					TOOLED, COLOR UNAVAILABLE
31404-6500	31404-6510			B		BLACK					TOOLED
31404-6600	31404-6610			C		BLACK					TOOLED
31404-6700	31404-6710			D		BLACK					TOOLED

EC NO: UAU2011-0398 DRAWN/CUNNINGHAM 2010/10/05 CHKD: APPR:VKOSHY REV	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				DRAWN BY RCARLSON		DATE 2003/09/25	TITLE 0.64 USCAR CONNECTOR SEALED SINGLE ROW ASSEMBLY		
				CHECKED BY RCARLSON		DATE 2004/09/28			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY VKOSHY		DATE 2010/11/22	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-31402-211

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

PART NUMBER WITHOUT CPA	PART NUMBER WITH CPA	CLIPSLOT OPTION	ROW/ CIRCUITS	KEY*	SEAL COLOR	CONNECTOR COLOR	WIDTH DIM (A)	MIN. PASS THRU DIA.	FEMALE TERMINAL SUPPLIER	USCAR FOOTPRINT DRAWING NO.	STATUS
31402-8100	31402-8110	NO	1 X 8	A	BLUE	BLACK	3125	(31.90)	TYCO OR MOLEX GET 0.64	064-S-008-1-Z02	NOT TOOLED
31402-8200	31402-8210			B		GRAY					NOT TOOLED
31402-8300	31402-8310			C		BROWN					NOT TOOLED
31402-8400	31402-8410			D		GREEN					NOT TOOLED
31402-8500	31402-8510			B		BLACK					NOT TOOLED
31402-8600	31402-8610			C		BLACK					NOT TOOLED
31402-8700	31402-8710			D		BLACK					NOT TOOLED
31403-8100	31403-8110			A		BLACK			MOLEX 0.64		NOT TOOLED
31403-8200	31403-8210			B		GRAY					NOT TOOLED
31403-8300	31403-8310			C		BROWN					NOT TOOLED
31403-8400	31403-8410			D		GREEN					NOT TOOLED
31403-8500	31403-8510			B		BLACK					NOT TOOLED
31403-8600	31403-8610			C		BLACK					NOT TOOLED
31403-8700	31403-8710			D		BLACK					NOT TOOLED
31404-8100	31404-8110			A		BLACK			YAZAKI KAIZEN 0.64		NOT TOOLED
31404-8200	31404-8210			B		GRAY					NOT TOOLED
31404-8300	31404-8310			C		BROWN					NOT TOOLED
31404-8400	31404-8410			D		GREEN					NOT TOOLED
31404-8500	31404-8510			B		BLACK					NOT TOOLED
31404-8600	31404-8610			C		BLACK					NOT TOOLED
31404-8700	31404-8710			D		BLACK					NOT TOOLED

ADDITIONAL CAVITY PLUG CONFIGURATIONS:

ROW/ CIRCUITS	FEMALE TERMINAL	MOLEX P/N WITH CPA	MOLEX P/N WITHOUT CPA	KEY OPTION	CLIPSLOT OPTION	COLOR	CIRCUIT NUMBER: "0" INDICATED PLUG LOCATION						TOTAL CIRCUITS PLUGGED	STATUS
							1	2	3	4	5	6		
1X6	TYCO/MOLEX GET	31402-6110	31402-6100	A	NO	BLACK							0	TOOLED
		31402-6111	31402-6101	A	NO	BLACK	0	0	0	0	0	0	6	TOOLED
		31402-6112	31402-6102	A	NO	BLACK	0	0					2	TOOLED
		31402-6113	31402-6103	A	NO	BLACK		0					1	TOOLED
		31402-6114	31402-6104	A	NO	BLACK	0	0	0	0			4	TOOLED
		31402-6115	31402-6105	A	NO	BLACK					0	0	3	TOOLED
		31402-6150	31402-6140	A	YES	BLACK							0	TOOLED
		31403-6110	31403-6100	A	NO	BLACK							0	TOOLED
	MOLEX 0.64	31403-6111	31403-6101	A	NO	BLACK	0	0	0	0	0	0	6	TOOLED
		31403-6112	31403-6102	A	NO	BLACK			0				1	TOOLED
	YAZAKI KAIZEN	31404-6110	31404-6100	A	NO	BLACK							0	TOOLED
		31404-6111	31404-6101	A	NO	BLACK	0	0	0	0	0	0	6	TOOLED
		31404-6112	31404-6102	A	NO	BLACK	0		0				2	TOOLED
		31404-6113	31404-6103	A	NO	BLACK	0				0		2	TOOLED
		31404-6116	31404-6106	A	NO	BLACK					0		1	TOOLED
		31404-6117	31404-6107	A	NO	BLACK	0		0			0	3	TOOLED
		31404-6118	31404-6108	A	NO	BLACK	0						1	TOOLED
		31404-6119	31404-6109	A	NO	BLACK			0		0	0	3	TOOLED
		31404-6132	31404-6122	A	NO	BLACK			0				1	TOOLED

ENTER DESCRIPTION EC NO. UAU2011-0398 DRAWN/CUNNINGHAM 2010/10/05 CHKD: APPR:VKOSHY 2010/11/22 REV DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	▽=0			MM ONLY	4:1	METRIC		
	▽=0	4 PLACES ± --- ± ---		DRAWN BY	DATE	TITLE		
	▽=0	3 PLACES ± --- ± ---		RCARLSON	2003/09/25			
		2 PLACES ± 0.13 ± ---		CHECKED BY	DATE	MOLEX INCORPORATED		
		1 PLACE ± 0.3 ± ---		RCARLSON	2004/09/28			
		ANGULAR ± 3 °		APPROVED BY	DATE	SD-31402-211		
				VKOSHY	2010/11/22			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		
				SEE CHART		5 OF 5		
				SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		